

Professional Power Amplifier

*AX SERIES POWER AMPLIFIER*

OWNER'S MANUAL

TECHNICAL PARAMETER'S CHANGERS ARE NOT INFORMED.

PROFESSIONAL POWER AMPLIFIER




Our product is improving. When the external form and parameter changes, please refer to the material object. We will not inform you especially.

*A*




## SPECIFICATIONS

Model	n
Stereo power	8
1KHz0.1% THD	4
	2
Bridge mono Power	8
1KHz0.1% THD	4
Signal to noise	
Slew Rate	
Damping Factor	
Frequency response	
THD	+/-0.1dB, 20Hz+20kHz
IMD	0.01% Rated Power@8 1kHz
Input sensitivity	0.01% Rated Power@8
LPF	0.775V, 1.0V, 1.55V
HPF	20Hz-180Hz Valid
Input impedance	130Hz-20KHz Valid
Input CMRR	10K/20K ohms, unbalanced or balanced
Cross talk	-75dB
LEP indicator	-70dB
Main power supply	Signal, Protect, Dctive, Clip/Limiting
Weight	-220V 50/60Hz FUSE:T15A
Dimensions(mm)	25Kg 483Wx490Dx88H



1	A					
2						
3	A	(XRL)	PIN 1 Ground)2	+ PIN 2 Hot) 3	- PIN 3 Cold)	
4	A	(XRL)	PIN 1 Ground)2	+ PIN 2 Hot) 3	- PIN 3 Cold)	
5	B	(XRL)	PIN 1 Ground)2	+ PIN 2 Hot) 3	- PIN 3 Cold)	
6	B	(XRL)	PIN 1 Ground)2	+ PIN 2 Hot) 3	- PIN 3 Cold)	
7	B		35			
8	/		1M			
9	4	8				
10	1			4		
	2					
	3					
11	A/B	/	20-180Hz	)		

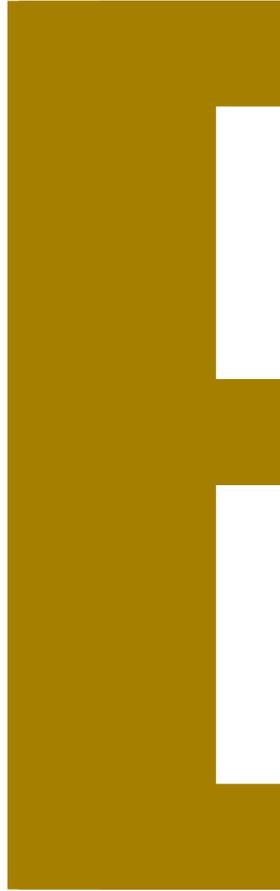

1 /  
/  
2

3 A 20

4 A LED ) LED CLIP

5 B LED ) LED CLIP

6 B 20

AX

1

2

AX

3

AX

AX

90

88

AX